




ETW for Commercial Hinges

Applications

Available in 4" through 8" full mortise ball bearing and anti-friction bearing, standard weight, and heavy weight in stainless steel and brass material
Available on heavyweight swing clear hinges

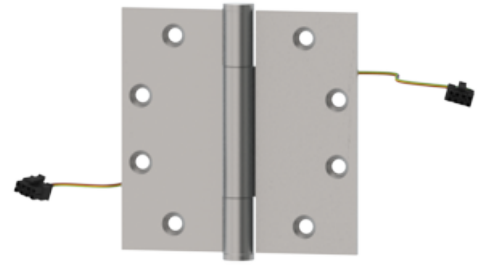

PRODUCT SPECIFICATIONS

Electrical Specifications:

Up to 48VDC at 3.5 amps continuous or 16.0 amps pulse

How To Order:

To order specify using suffix "ETW"

Material:

Steel, brass, or stainless steel

Notes:

18, 22, or 28 gauge wires available
NRP not necessary as hinges are cross pinned and are not field removable
Low voltage electric current transfer capability only
2, 4, 8, or 12 continuous electric conductors
Competitive wire and quick connect configurations available

Options:

Quick Connect optional allowing for quick and easy installation.
Molex connectors attaches to both the frame and the door side of the hinge.

Also available: ETW-2 (18GA), ETW-6-1828 (2-18GA, 4-28GA), ETW-8-1828 (2-18GA, 6-28GA), ETW-12 (all 28 gauge)

Product Name:

Electric Through-Wire Only (Quick Connect Shown)

Size:

4" x 4" (102 mm x 102 mm)
4-1/2" x 4-1/2" (114 mm x 114 mm)
5" x 5" (127 mm x 127 mm)